

SDC Standard Stave Core Specifications



SOMERSET
DOOR & COLUMN
COMPANY

174 Sagamore Street
Somerset Pennsylvania, 15501
1-800-242-7916 | 814-444-9427
Fax: 814-443-1658
www.doorandcolumn.com

GENERAL:

Computer controlled precision machining on all work. All doors built to requested specifications. Only premium kiln dried lumber is used for the construction of Somerset Door & Column Co. doors. Particle board or other fillers are not used unless specified by custom order.

GLASS:

Custom per order or supplied without glass

ADHESIVE:

Type II (Waterproof)

AVAILABLE SIZES:

All standard sizes and custom.

THICKNESS:

1 3/8", 1 3/4", 2 1/4" and custom.

STILES:

Stiles are constructed of a stave core design. (See below) *Same species as veneer available upon request.

RAILS:

Rails are solid wood unless otherwise specified.

PANELS:


Panels are solid wood unless otherwise specified.

CORNERS:


Corner construction is typically doweled. Mortise and tennon available upon request.

MACHINING:

Complete machining to customer specifications per order.

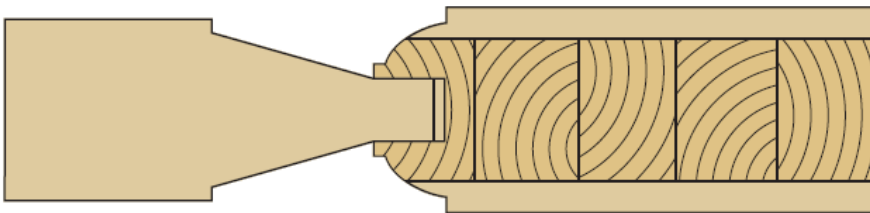

NOTE: 1/4" thick veneer, core is the same type of material.
Stave core allows better color selection and is less likely to bow.

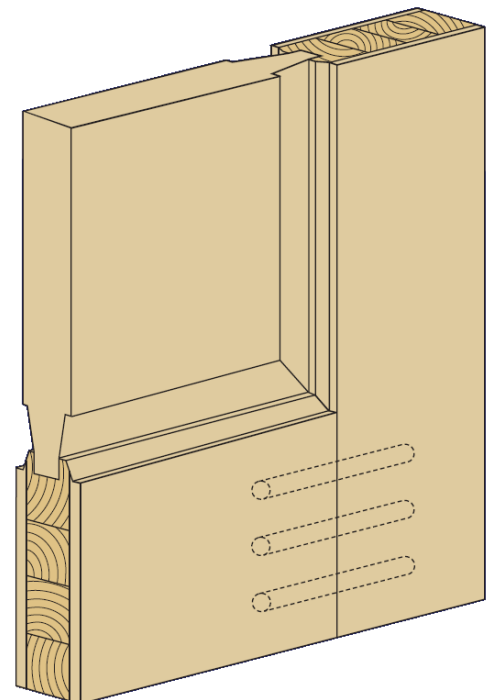

Bottom corner cut out

